



210 x 105 x 65mm Chamfered Clay Paviers



COLOUR, CHARACTER, TEXTURE, FLEXIBILITY,
AVAILABILITY, INNOVATION. BUT ABOVE ALL QUALITY.


Nibbed Chamfered Pavors




CHARCOAL




IPSWICH

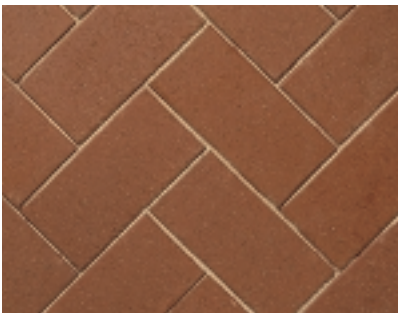


HADLEY RED

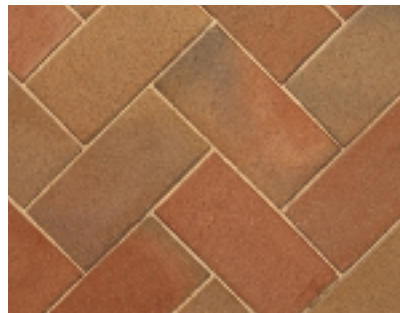


HADLEY RED BRINDLE

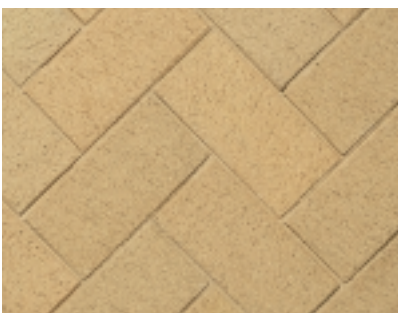

HARVEST BUFF

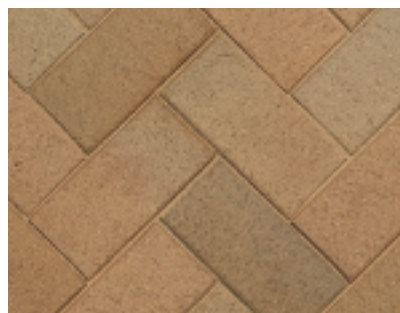

HARVEST BUFF BRINDLE

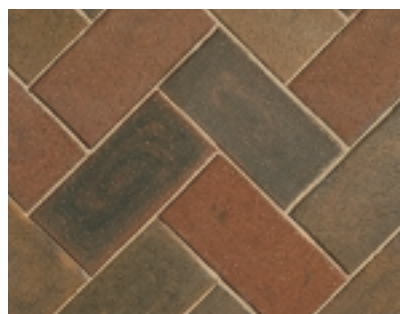

CASTLEYARD

BLOCKLEYS' NIBBED CHAMFERED PAVIORS exhibit permanent 'through body' colours. They are unaffected by road salts, oil and petroleum spillages and, to a degree, are kept clean by natural weathering, planned maintenance activities and the passage of vehicular traffic. They are totally frost resistant and have excellent slip and skidding resistance characteristics.

All paviors in the range are double sided and have discrete chamfers on all eight bed face arrises.


Nibs on the vertical faces maintain a positive gap between paviors. This facilitates joint infill during construction and promotes the development of interlock, thereby maximising the early life performance of the pavement.

A wide selection of clay pavior accessories, including kerbs, channels and products to aid the mobility of the blind and partially sighted, is available to complement the chamfered pavior range. This is detailed in our publication - Blockleys Pavior Accessories.


Blockleys' Technical Department is also available to offer expert advice and information on all matters relating to the design, specification and performance of flexible clay pavements.

Please do not hesitate to contact us with any queries you may have.


A selection from the full range of pavior accessories available

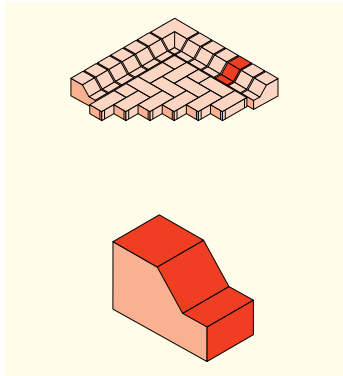

Buckfast Kerb

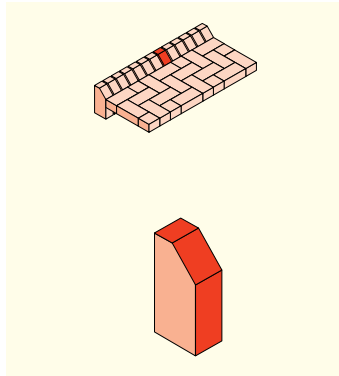

Cant Kerb

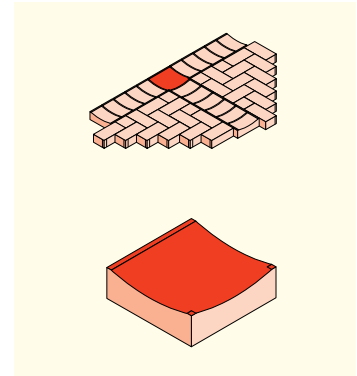

Channel 'T' Junction



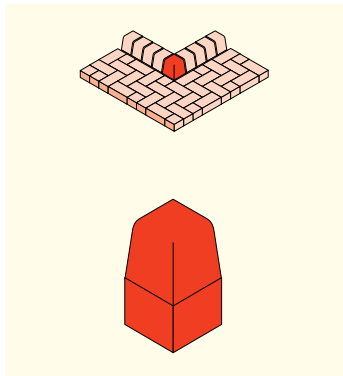


Fig 7 Kerb 90°
External Return

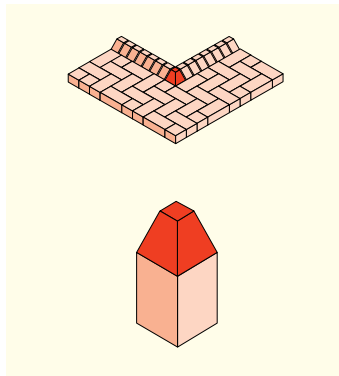

Cant Kerb 90°
External Return

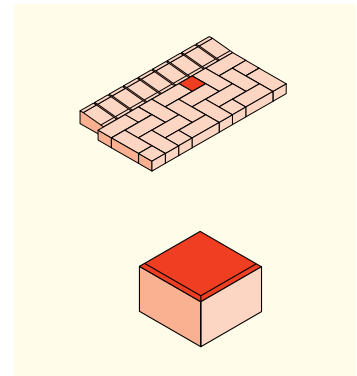

Single Sett



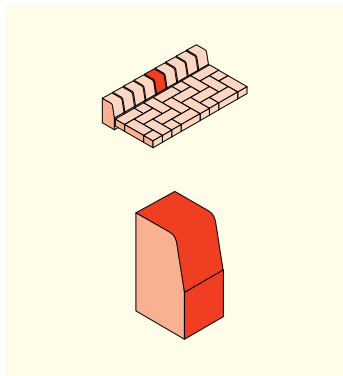


Fig 7 Kerb

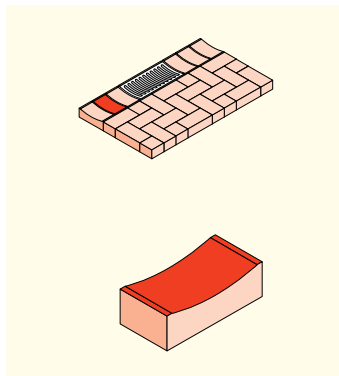

Channel Unit

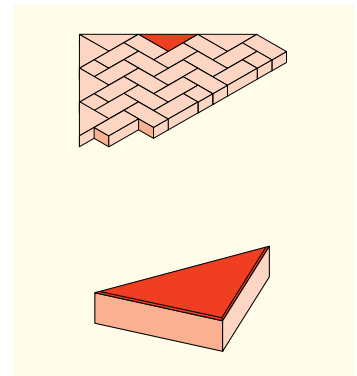

Triangular
Starter Unit



BS EN 1344



210 x 105 x 65mm Chamfered Clay Paviers

Technical Data

Work Size	207 x 102 x 65mm
Co-ordinating Size (including nibs)	210 x 105 x 65mm
Dimensional Tolerance	Meet tolerance requirements
Range	R1
Transverse Breaking Load	T4
Frost Resistance	FP (100) Frost Resistant
Slip Resistance	U3
Abrasion Resistance	A3
Liability to Efflorescence	Nil
Quantity per pack	400 (4 x 100)
Coverage per pack	8.89 sqm

Where appropriate technical properties are assessed in accordance with the requirements of BS EN 1344:2002

Information in this leaflet is provided for guidance only.
Due to the limitations of photography and printing, the colours and textures illustrated are for use as a guide only. Actual samples are available on request.

Blockleys Brick Ltd. reserves the right to amend specifications and prices at any time without prior notice, in the pursuit of continuous product development.



Blockleys Brick Limited, Sommerfeld Road,
Trench Lock, Telford, Shropshire TF1 5RY.
Telephone: 01952 251933. Fax: 01952 265377.

e-mail: sales@blockleys.com

web-site: www.blockleys.com

Blockleys Brick Limited is part of the Michelmersh Group of Companies.